


AWWA C508 Rubber Disc Swing Check Valve (JHH44J)

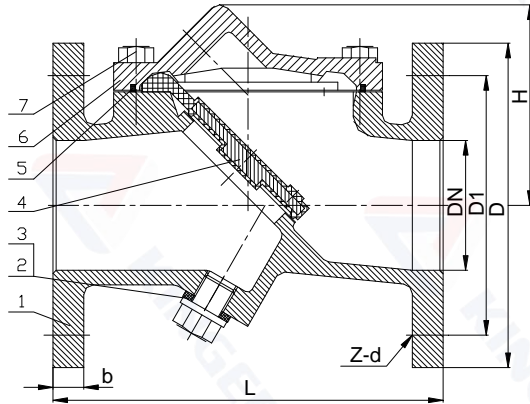

MATERIAL SPECIFICATION

PART NO.	Description	Material Specification	Options
1	Valve Body	Ductile Iron ASTM A536	
2	Plug	Carbon Steel A3	
3	Minipad	TFL	
4	Disc	EPDM ASTM D2000+DI ASTM A536	
5	Gasket	NBR ASTM D2000	
6	Bonnet	Ductile Iron ASTM A536	
7	Bolt	Carbon Steel A3	

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

- Connection Ends: Flange to ASME B16.1 CL 125
- Working Pressure: 300PSI
- Temperature Range: 32°F-176°F
- Coating: Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550

Item No.	DN	Dimensions(Inch)					
		D	D1	L	b	Z-d	H
JHH44J02FLG	2"	6.00	4.75	8.00	0.625	4-Φ0.750	3.27
JHH44J25FLG	2.5"	7.00	5.50	8.50	0.688	4-Φ0.750	3.54
JHH44J03FLG	3"	7.50	6.00	9.50	0.750	4-Φ0.750	3.74
JHH44J04FLG	4"	9.00	7.50	11.50	0.938	8-Φ0.750	4.33
JHH44J05FLG	5"	10.00	8.50	13.00	0.938	8-Φ0.875	5.31
JHH44J06FLG	6"	11.00	9.50	14.00	1.000	8-Φ0.875	6.14
JHH44J08FLG	8"	13.50	11.75	19.50	1.167	8-Φ0.875	7.32
JHH44J10FLG	10"	16.00	14.25	24.50	1.188	12-Φ1.000	8.43
JHH44J12FLG	12"	19.00	17.00	27.50	1.250	12-Φ1.000	9.65
JHH44J14FLG	14"	21.00	18.75	31.00	1.375	12-Φ1.125	14.17
JHH44J16FLG	16"	23.50	21.25	36.00	1.438	16-Φ1.125	15.94
JHH44J24FLG	24"	32.00	29.50	48.00	1.875	20-Φ1.375	20.63